



# How to pack printer Young



1. Open front cover and fix carriage with doublesided tape.

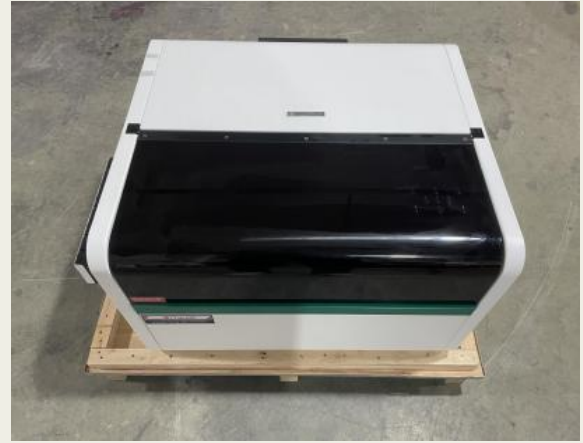

2. Remove ink cartridges and waste ink cartridges. Insert ink holes with soft tubes or empty ink cartridges.

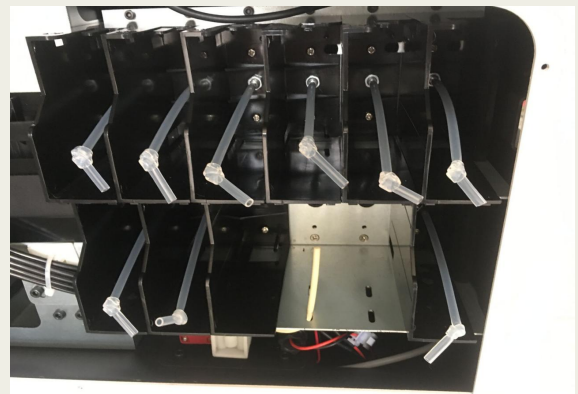



## Thank You for your valuable time!

We are committed to meet the best there is for you.  
Have thoughts on a specific requirement that's not on the list?  
Let us know! Customized solutions are our specialty and it can  
be done for you.



+86-18611333892



ccc@ artisjet.com